



多闕定位鎖 locking block sets

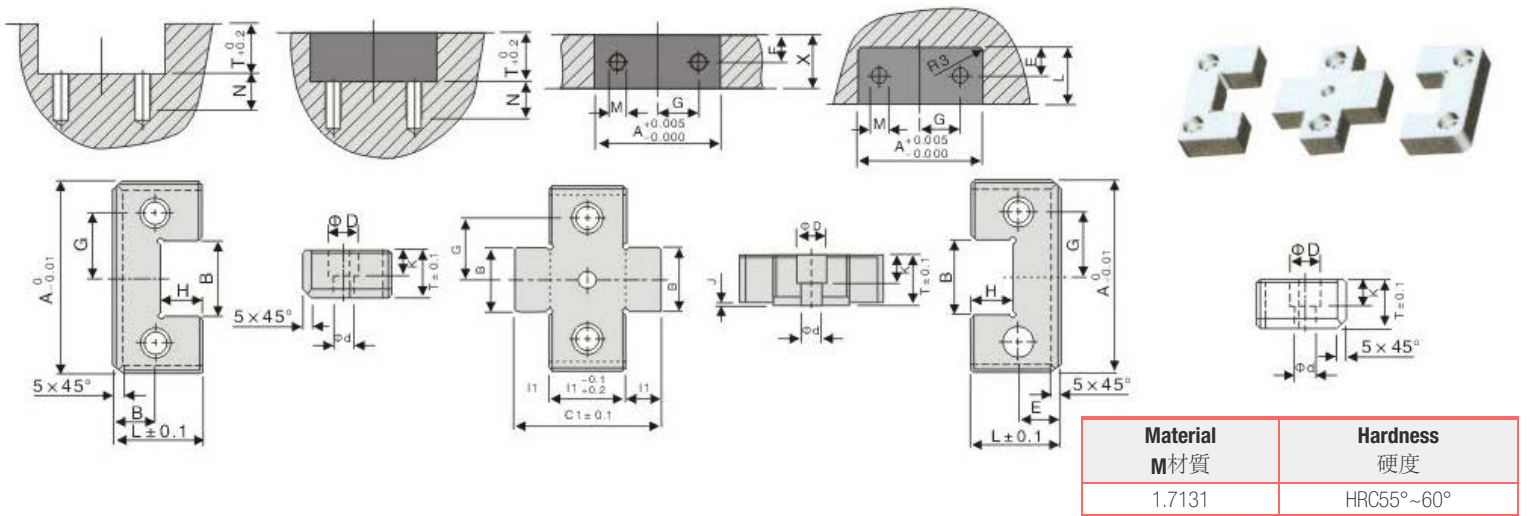

| 型號/Type | 尺寸/dimension | | | | | | | | | | | | | | | | | |
|-------------|--------------|----|----|----|------|------|----|----|----|-----|-----|-----|----|------|----|----|-----|----|
| | A | X | B | C1 | D | d | E | F | G | h | H | J | K | L | L1 | T | M | N |
| JHN17-5026 | 50 | 26 | 17 | 43 | 10.5 | 6.5 | 11 | 13 | 17 | 8.5 | 9.5 | 1.5 | 8 | 21.5 | 26 | 16 | M6 | 15 |
| JHN17-5036 | | 36 | | 53 | | | | 36 | | | | | | | | | | |
| JHN17-7526 | 75 | 26 | 25 | 51 | 16.5 | 10.5 | 18 | 13 | 25 | 14 | 15 | 1.5 | 12 | 36 | 26 | 19 | M10 | 20 |
| JHN17-7536 | | 36 | | 61 | | | | 36 | | | | | | | | | | |
| JHN17-10036 | 100 | 36 | 35 | 71 | 16.5 | 10.5 | 22 | 18 | 35 | 20 | 21 | 1.5 | 12 | 45 | 46 | 25 | M10 | 20 |
| JHN17-10046 | | 46 | | 81 | | | | 46 | | | | | | | | | | |
| JHN17-12536 | 125 | 36 | 45 | 71 | 16.5 | 10.5 | 22 | 13 | 42 | 20 | 21 | 1.5 | 12 | 45 | 36 | 25 | M10 | 20 |
| JHN17-12546 | | 46 | | 81 | | | | 46 | | | | | | | | | | |

2D下載 3D下載 返回索引

多闕定位鎖

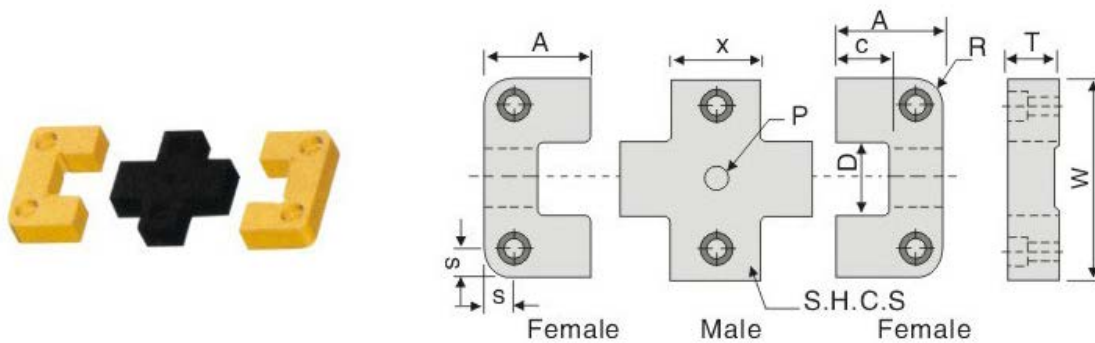

| Material 材質 | Whole Hardness 整體硬度 | Surface Hardness 表面硬度 |
|----------------|------------------------|--------------------------|
| A-2 | HRC50°~56° | |
| H-13 | HRC50°~56° | HRC80° |

| 型號/Type | 尺寸/dimension | | | | | | | | | |
|---------------|------------------|------------------|------------------|------------------|------|-------------|------|------|------------------|---|
| | W | T | X | A | C | D | R | S | P | 內六角螺場絲 internal hexagon screw S.H.C.S |
| JHN18-50x87 | +0.000 -0.004 | +0.000 -0.002 | +0.000 -0.005 | +0.000 -0.002 | ±0.1 | .0001/.0002 | .187 | ±0.1 | +0.001 -0.000 | #10-32x5/8" |
| JHN18-75x137 | | | 1.375 | | 1.12 | 1.250 | .250 | .375 | .313 | 1/4-20x3/4" |
| JHN18-75x187 | | | 1.875 | | | 1.500 | .500 | .500 | .375 | 3/8-16x1" |
| JHN18-100x137 | | | 1.375 | | | | | | | |

2D下載 3D下載 返回索引